


CARACTERÍSTICAS / FEATURES


Material hormigón petra 1
Acabado decapado e hidrofugado
Dimensiones l. 280, a. 60, h. 80 cm
Color ver carta de colores
Fijación anclado mediante varilla roscada y resina epoxy
Peso 1650 Kg
Palet 300 x 80 x 100 cm
Peso palet 1680 Kg

Material precast concrete petra 1
Finish scaled and waterproofed
Dimensions l.280, a. 60, h. 80 cm
Colour see colour catalogue
Fixing anchored with metal rod and epoxy resin
Weight 1650 Kg
Palette 300 x 80 x 100 cm
Weight pallet 1680 Kg


diseñador / design: I+D nago:urban

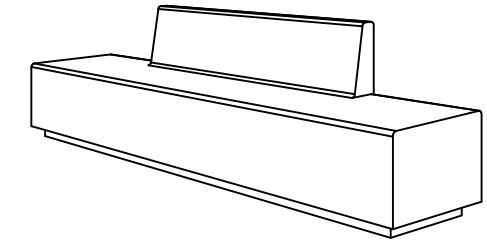


GEOMETRIA / GEOMETRY

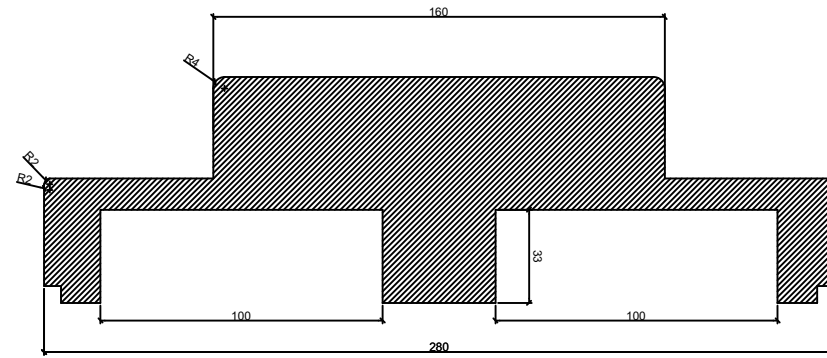


SECCIÓN / SECTION

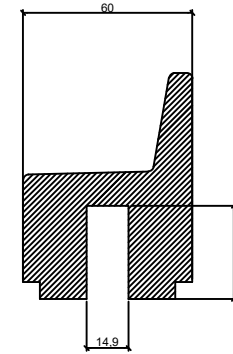


SECCIÓN / SECTION

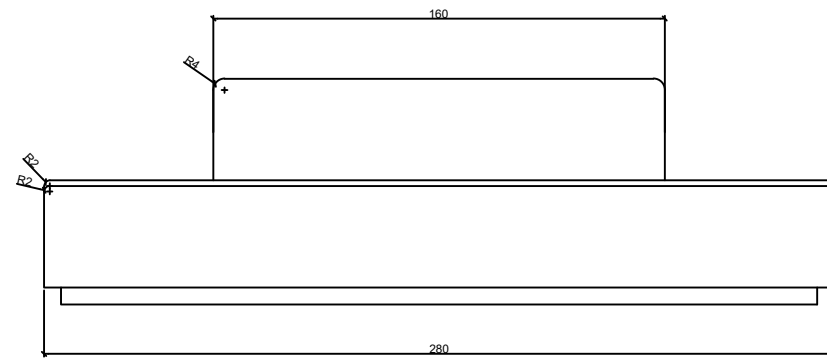

PLANTA / TOP VIEW




PERFIL / PROFILE VIEW




MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION

elevación / hoisting
 P= 1590 Kg

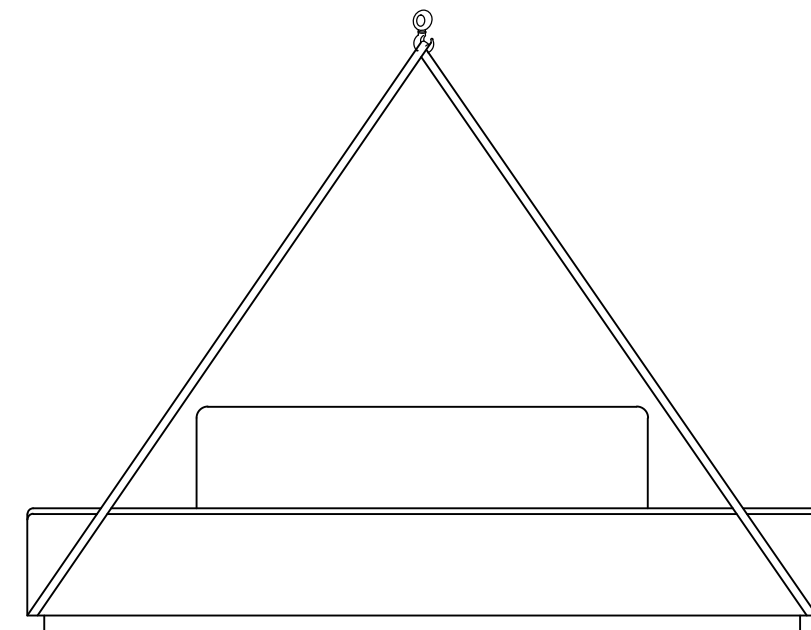


ESPECIFICACIONES / SPECIFICATIONS

SISTEMA DE FIJACIÓN / ANCHORAGE SYSTEM

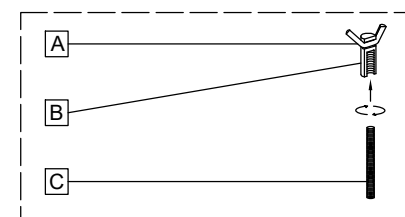


- A barra corrugada / corrugated rod
- B casquillo roscado / thread sleeve
- C varilla roscada / thread the rod
- D espuma embalaje / packing foam




DETALLE N / DETAIL N

Barra corrugada acero negro Ø6 - REA6
 Corrugated rod black steel Ø6 - REA6 [A]



Casquillo M12 - Tubo acero zincado alta precisión
 Galvanized steel threaded sleeve M12 high precision [B]



DETALLE OPCIÓN B / DETAIL OPTION B