

CARACTERISTICAS / FEATURES



Material hormigón Petra 1
Acabado decapado e hidrofugado
Dimensiones Ø 60, h. 85 cm
Color ver carta de colores
Fijación apoyado por su propio peso o mediante resina epoxi
Peso 245 kg
Palet 70 x 70 cm


Material precast concrete Petra 1
Finish scaled and waterproofed
Dimensions Ø 60, h. 85 cm
Colour see colour catalogue
Fixing resting on the ground or with epoxy resin
Weight 245 kg
Pallet 70 x 70 cm

diseñador / design: SUMA Arquitectes




PILOSILLA


GEOMETRIA / GEOMETRY

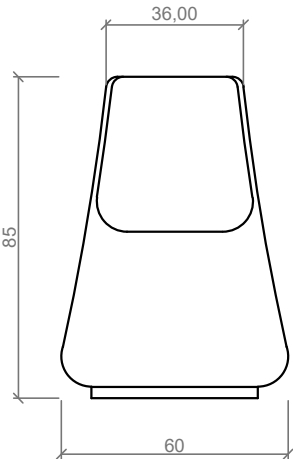

ALZADO / FRONT VIEW




PERFIL / PROFILE




PLANTA / TOP VIEW

ESPECIFICACIONES / SPECIFICATIONS



SECCION A-A' / SECTION A-A'

Detalle N
Detail N




DETALLE M / DETAIL M


Casquillo M12 - Acero zincado alta precisión
Threaded sleeve M12 - Galvanized steel high precision

MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION


- 1 Perforar agujero de Ø2 cm
Drill hole of Ø2 cm




- 2 Verter resina epoxi
Pour epoxy resin



- 3 Elevar, enroscar varilla inferior e insertar la varilla en el agujero
Raise, screw lower rod and insert metal rod in hole

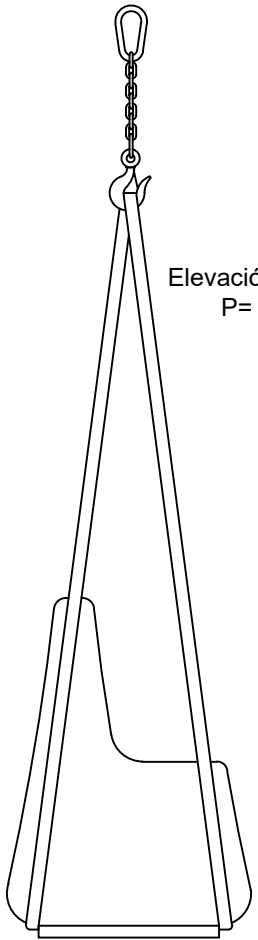

Elevación / Hoisting
P= 245 kg

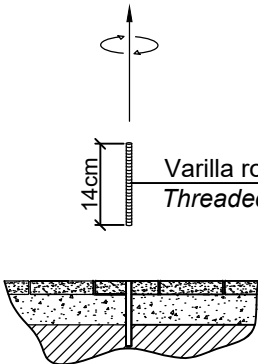

Varilla roscada M12
Threaded rod M12