



CARACTERISTICAS / FEATURES



Material hormigón Petra 1
Acabado decapado e hidrofugado
Dimensiones l. 117, a. 40, h. 92 cm
Color ver carta de colores
Fijación simplemente apoyado o mediante varilla metálica
Peso 613 Kg
Palet 120 x 80 cm (1 un)
120 x 100 cm (2 un)


Material precast concrete Petra 1
Finish scaled and waterproofed
Dimensions l. 117, w. 40, h. 92 cm
Colour see colour catalogue
Fixing resting on the ground or with metal rod
Weight 613 Kg
Pallet 120 x 80 cm (1 un)
120 x 100 cm (2 un)

dineñador / design: Estudi Ribaudi

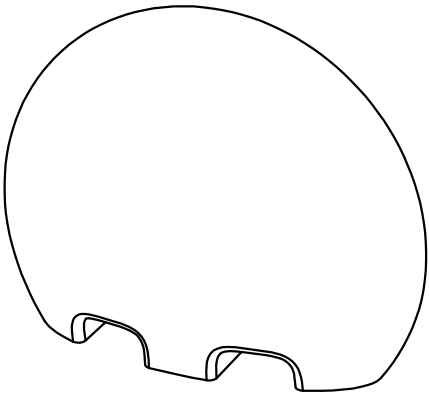


COVERT


GEOMETRIA / GEOMETRY

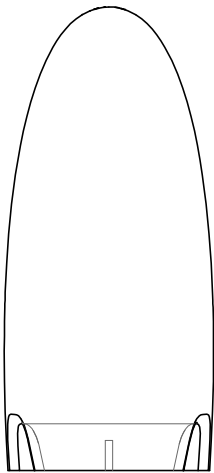

PERFIL / PROFILE

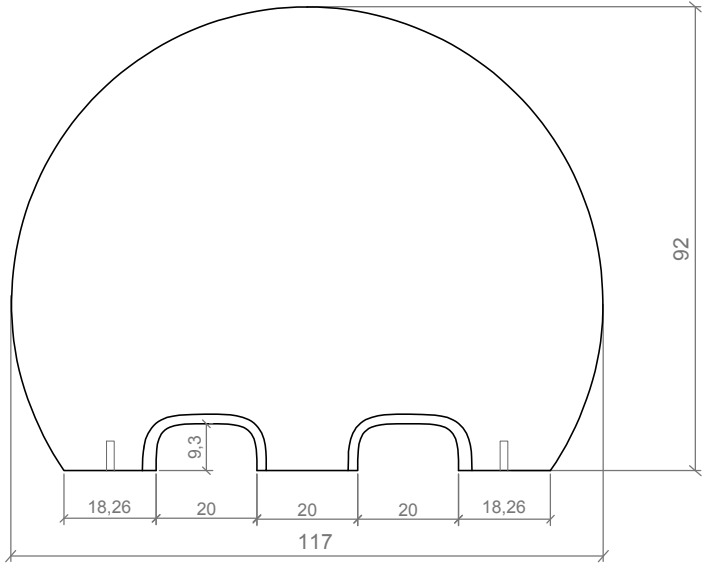


ALZADO / FRONT VIEW

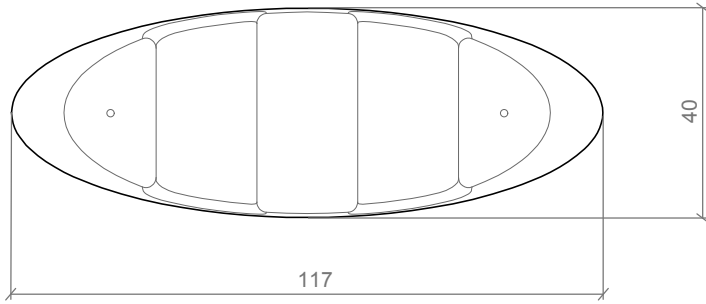


PLANTA INFERIOR / BOTTOM VIEW

ESC. 1:15

ESPECIFICACIONES / SPECIFICATIONS

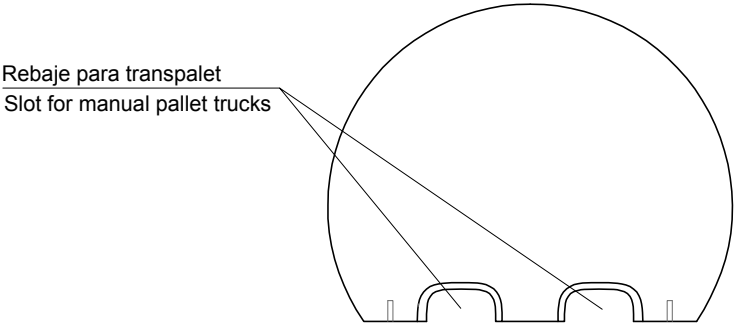


Rebaje para transpalet
Slot for manual pallet trucks

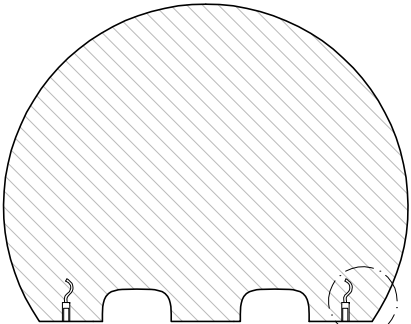

SECCIÓN / SECTION





Casquillo roscado M16
Tubo acero zincado alta precisión
Galvanized steel
threaded sleeve high
precision M16



DETALLE 1 / DETAIL 1

MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION

- 1 Elevar y enroscar las varillas.
Lift and threaded the rods.
- 2 Perforar y verter resina epoxy.
Drill and pour epoxy resin.
- 3 Insertar las varillas en los agujeros.
Insert the rods in the holes.

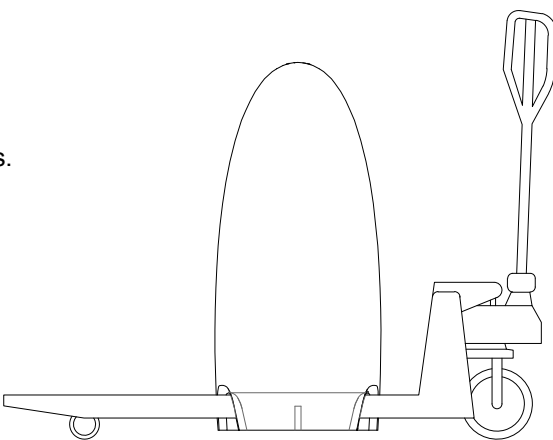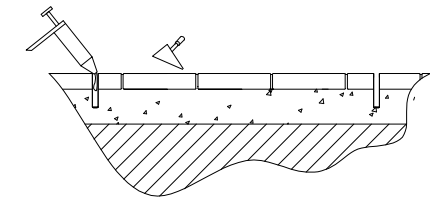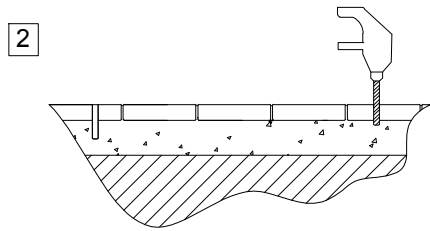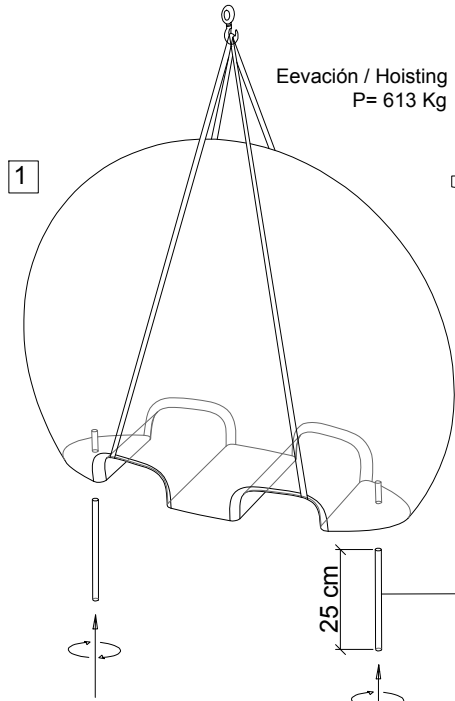

Varilla roscada Ø16
Threaded rod Ø16

Tàrrrega, Lleida - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com

magourban

