


CARACTERISTICAS / FEATURES

Material hormigón petra 1
Acabado decapado e hidrofugado
Dimensiones l. Ø190, h. 47 cm
Color ver carta de colores
Fijación simplemente apoyado
Peso / Capacidad 931 kg / 335 L
Bulto 200 x 200 x 65 cm
Peso bulto 950 kg


Material precast concrete preta 1
Finish scaled and waterproofed
Dimensions l. Ø190, h. 47 cm
Colour see colour catalogue
Fixing resting on the ground
Weight / Capacity 931 kg / 335 L
Package 200 x 200 x 65 cm
Weight package 950 kg

diseñador / design: Gaudio Marsille

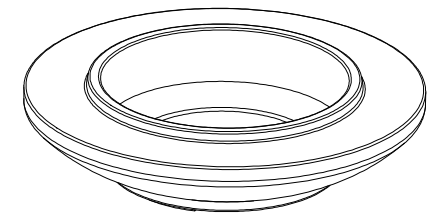


DISH

GEOMETRIA / GEOMETRY

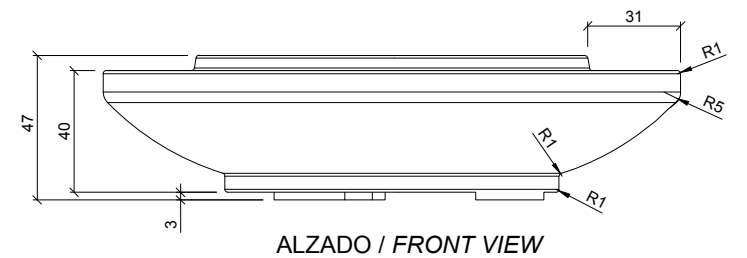


↑ ubicación del casquillo roscado
location of steel socket threaded


- A barra corrugada / corrugated rod
- B casquillo roscado / threaded sleeve
- C cáncamo / eyebolt
- D tapa / stopper
- E varilla roscada / threaded rod

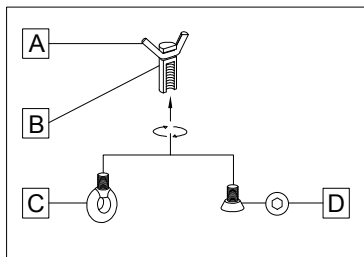

SISTEMA DE ELEVACION / LIFTING SYSTEM

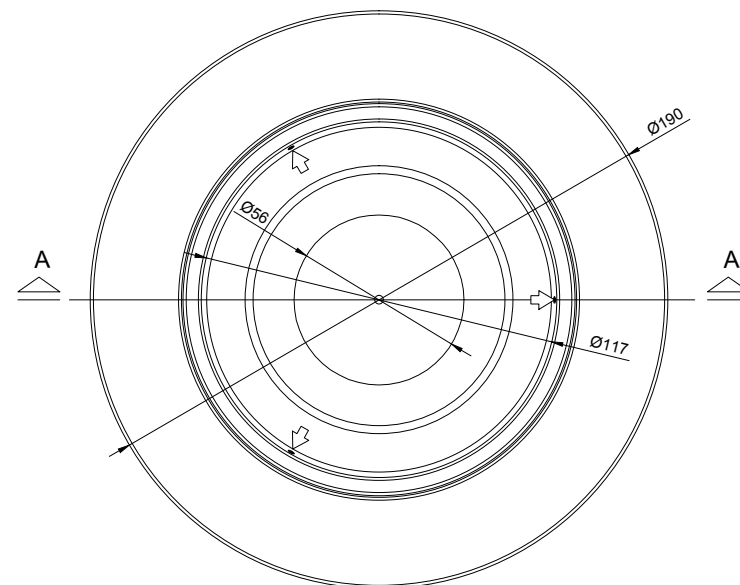


PLANTA / TOP VIEW




MANIPULACION E INSTALACION / HANDLING AND INSTALLATION


- 1 extraer tapas / extract stoppers
- 2 enroscar cáncamo / thread the eyebolt

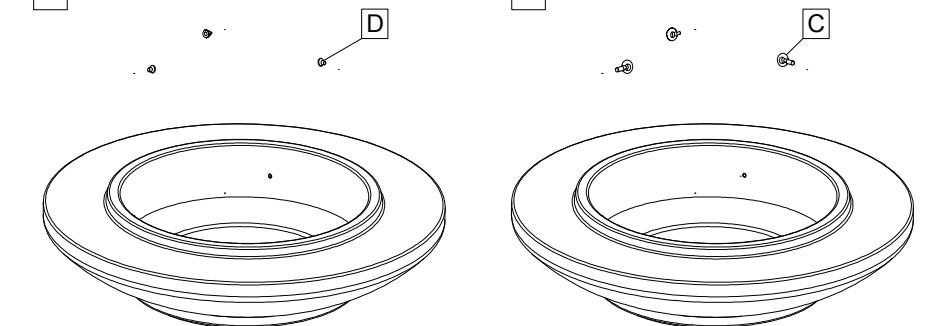

- 3 elevar e instalar / lift and install

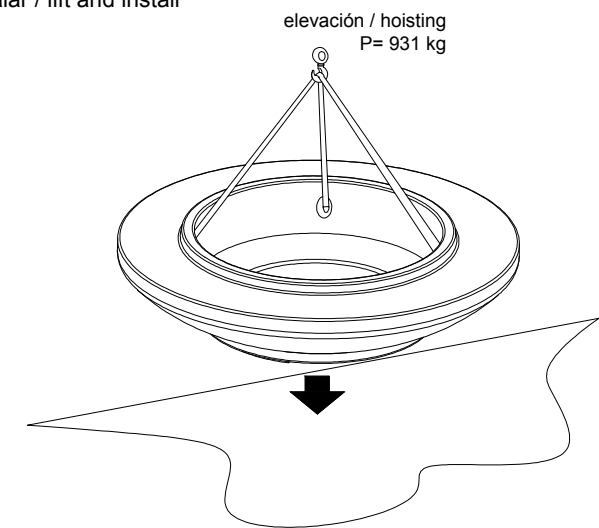


ESPECIFICACIONES / SPECIFICATIONS

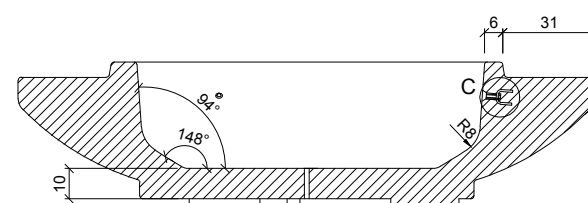

SECCION A-A' / SECTION A-A'

Tornillo avellanado M16 - Inox
Countersunk screw M16 - Inox

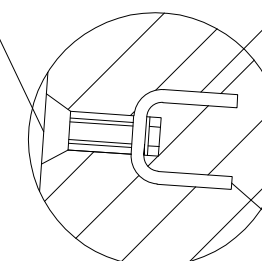

DETALLE C / DETAIL C

Tubo acero zincado M16 alta precisión
Galvanized steel threaded sleeve M16 high precision

Barra corrugada acero negro Ø6 - REA6
Corrugated rod black steel Ø6 - REA6

Tàrraga. Lleida - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com

magourban